



## *Center-Mount Pantry Roll-Out* & *Baskets*

- Mounted to KV precision ball-bearing slides
- KV Eco-Friendly Frosted Nickel finish
- Center-Mount Baskets (sold separately) mount with four screws (included)
- Basket height can be varied in 3-3/4" increments
- Basket platforms are 1/2" thick Birch veneer with a UV-cured clear coat finish

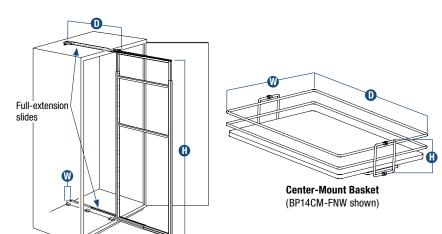



	Maximum	Individual Product Dimensions			Platform	Units per	Weight per					
Stock #	# of Baskets	Height ዘ	Width	Depth 🕕	[Wire/Platform]	Carton	Carton					
CENTER-MOUNT PANTRY ROLL-OUTS												
P1875CM-FN	2	20-1/2" – 22-1/2" [521 – 572 mm]	3-13/16" [97 mm]	22-1/4" [565 mm]	Frosted Nickel*/Birch	1	12.6 lbs. [5.7 kg.]					
P2500CM-FN	2	26-3/4" – 28-3/4" [679 – 730 mm]	3-13/16" [97 mm]	22-1/4" [565 mm]	Frosted Nickel*/Birch	1	13.5 lbs. [6.1 kg.]					
P4250CM-FN	4	44" – 49-3/8" [1,118 – 1,254 mm]	3-13/16" [97 mm]	22-1/4" [565 mm]	Frosted Nickel*/Birch	1	15.6 lbs. [7.1 kg.]					
P4650CM-FN	5	48" – 53-3/8" [1,219 – 1,356 mm]	3-13/16" [97 mm]	22-1/4" [565 mm]	Frosted Nickel*/Birch	1	15.9 lbs. [7.2 kg.]					
P5450CM-FN	6	56" – 61-3/8" [1,422 – 1,559 mm]	3-13/16" [97 mm]	22-1/4" [565 mm]	Frosted Nickel*/Birch	1	17 lbs. [7.7 kg.]					
CENTER-MOUNT BAS	KETS											
BP5CM-FNW	-	4-1/8" [105 mm]	5" [127 mm]	20-7/16" [519 mm]	Frosted Nickel*/Birch	2	6.3 lbs. [2.9 kg.]					
BP8CM-FNW	-	4-1/8" [105 mm]	8" [203 mm]	20-7/16" [519 mm]	Frosted Nickel*/Birch	2	8.8 lbs. [4.0 kg.]					
BP11CM-FNW	-	4-1/8" [105 mm]	11" [279 mm]	20-7/16" [519 mm]	Frosted Nickel*/Birch	2	12.1 lbs. [5.5 kg.]					
BP14CM-FNW	_	4-1/8" [105 mm]	14" [356 mm]	20-7/16" [519 mm]	Frosted Nickel*/Birch	2	13.5 lbs. [6.1 kg.]					
BP17CM-FNW	-	4-1/8" [105 mm]	17" [432 mm]	20-7/16" [519 mm]	Frosted Nickel*/Birch	2	16 lbs. [7.3 kg.]					
BP20CM-FNW	-	4-1/8" [105 mm]	20" [508 mm]	20-7/16" [519 mm]	Frosted Nickel*/Birch	2	17.4 lbs. [7.9 kg.]					

Sliding assembly width is the same as widest basket width. Load capacity not to exceed 100 lbs.

**BP11CM-FNW** 

\* Eco-Friendly. See page 4 for more information.

See page 62 for recommended cabinet dimensions and clearances.

## Cabinet Dimensions

<b>A I I</b>	Min. Cabinet Opening		Minimum Interior Cabine	Minimum Cabinet Clearances		
Stock #	Width 🕕	Width 🖤	Height 🕕	Depth 🕕	Front 🕞	Back B
Slide-Out Base Blind	l Corner Units					
BBCS-L-15-FN	14-1/2" [368 mm]	26-11/16" [678 mm]	20-1/4" [514 mm]	22-11/16" [576 mm]	1/4" [6 mm]	1/4" [6 mm]
BBCT-L-15-FN	14-1/2" [368 mm]	26-11/16" [678 mm]	27-1/4" [692 mm]	22-11/16" [576 mm]	1/4" [6 mm]	1/4" [6 mm]
BBCS-R-15-FN	14-1/2" [368 mm]	26-11/16" [678 mm]	20-1/4" [514 mm]	22-11/16" [576 mm]	1/4" [6 mm]	1/4" [6 mm]
BBCT-R-15-FN	14-1/2" [368 mm]	26-11/16" [678 mm]	27-1/4" [692 mm]	22-11/16" [576 mm]	1/4" [6 mm]	1/4" [6 mm]
Center-Mount Pantry	/ Roll-Outs					
P1875CM-FN	*	*	20-1/2" [520 mm]	22-1/4" [565 mm]	-	-
P2500CM-FN	*	*	26-3/4" [679 mm]	22-1/4" [565 mm]	_	-
P4250CM-FN	*	*	44" [1,117 mm]	22-1/4" [565 mm]	-	-
P4650CM-FN	*	*	48" [1,219 mm]	22-1/4" [565 mm]	_	-
P5450CM-FN	*	*	56" [1,422 mm]	22-1/4" [565 mm]	-	_
Pot & Pan Pantry Org	ganizer					
PAN1700TM-FN	17-1/2" [444 mm]	17-1/2" [444 mm]	19-3/8" [492 mm]	23-3/4" [603 mm]	-	1/2" [13 mm
Pot & Pan Caddy	. ,	. ,				
SPS21-FN	20" [508 mm]	20" [508 mm]	14-3/4" [375 mm]	22-3/4" [578 mm]	1/4" [6 mm]	1/4" [6 mm]
SPS27-FN	26" [660 mm]	26" [660 mm]	14-3/4" [375 mm]	22-3/4" [578 mm]	1/4" [6 mm]	1/4" [6 mm]
Wood & Wire Tray Di					., . [o min]	., . [0 mm]
TDRO-FNW-6	6" [152 mm]	6" [152 mm]	14-1/2" [368 mm]	22-3/4" [578 mm]	1/4" [6 mm]	1/4" [6 mm]
TDRO-FNW-9	9" [229 mm]	9" [229 mm]	14-1/2" [368 mm]	22-3/4" [578 mm]	1/4" [6 mm]	1/4" [6 mm]
	age 59 for additional cleara		14-172 [300 mm]	22-5/4 [5/6 mm]	174 [0 mm]	1/4 [0 1111]
Appnance Lift (see p	Platform Width	Platform Width		Minimum of 16, 1/0" [/10, mm]		
HAL-20	+ 1" [25 mm]	+ 2-1/2" [64 mm]	25" [634 mm]	Minimum of 16-1/2" [419 mm] OR platform depth	1/2" [13 mm]	1/2" [13 mm
Hampers					4 (41) [0]	4 / 411 [0
PSH15-160-W	15" [381 mm]	15-5/8" [397 mm]	21-9/16" [548 mm]	19-5/8" [498 mm]	1/4" [6 mm]	1/4" [6 mm]
PDMSH15-1-60-W	15" [381 mm]	15-5/8" [397 mm]	21-9/16" [548 mm]	19-5/8" [498 mm]	1/4" [6 mm]	1/4" [6 mm]
H1215-W	12" [305 mm]	12-5/8" [321 mm]	15-1/8" [384 mm]	19-1/4" [489 mm]	1/4" [6 mm]	1/4" [6 mm]
H1218-W	12" [305 mm]	12-5/8" [321 mm]	19-3/8" [492 mm]	19-1/4" [489 mm]	1/4" [6 mm]	1/4" [6 mm]
H1515-W	15" [381 mm]	15-5/8" [397 mm]	15-1/8" [384 mm]	19-1/4" [489 mm]	1/4" [6 mm]	1/4" [6 mm]
H1518-W	15" [381 mm]	15-5/8" [397 mm]	19-3/8" [492 mm]	19-1/4" [489 mm]	1/4" [6 mm]	1/4" [6 mm]
MH1215-W	12" [305 mm]	12-5/8" [321 mm]	15-1/8" [384 mm]	16-1/2" [419 mm]	1/4" [6 mm]	1/4" [6 mm]
T01710-1-W	11" [279 mm]	11" [279 mm]	18-1/4" [464 mm]	19-5/16" [491 mm]	1/4" [6 mm]	1/4" [6 mm]
T01710-W	11" [279 mm]	11" [279 mm]	18-1/4" [464 mm]	19-5/16" [491 mm]	1/4" [6 mm]	1/4" [6 mm]
T01713-1-W	14" [356 mm]	14" [356 mm]	18-1/4" [464 mm]	19-5/16" [491 mm]	1/4" [6 mm]	1/4" [6 mm]
T01713-W	14" [356 mm]	14" [356 mm]	18-1/4" [464 mm]	19-5/16" [491 mm]	1/4" [6 mm]	1/4" [6 mm]
T01716-1-W	17" [432 mm]	17" [432 mm]	18-1/4" [464 mm]	19-5/16" [491 mm]	1/4" [6 mm]	1/4" [6 mm]
T01716-W	17" [432 mm]	17" [432 mm]	18-1/4" [464 mm]	19-5/16" [491 mm]	1/4" [6 mm]	1/4" [6 mm]
Pull-Out Towel Bar						
P79 3 ANO	5-5/16" [135 mm]	5-5/16" [135 mm]	1-13/16" [46 mm]	18-1/4" [464 mm]	1/4" [6 mm]	1/4" [6 mm]
Center-Mount Pantry	/ Roll-Out					
P1875CM-W	*	*	20-1/2" [520 mm]	22-1/4" [565 mm]	-	-
P2500CM-W	*	*	26-3/4" [670 mm]	22-1/4" [565 mm]	-	-
P4250CM-W	*	*	44" [1,117 mm]	22-1/4" [565 mm]	_	
P4650CM-W	*	*	48" [1,219 mm]	22-1/4" [565 mm]	_	-
P5450CM-W	*	*	56" [1,422 mm]	22-1/4" [565 mm]	_	
Side-Mount Pantry F	Roll-Out					
P4250FE-W	*	*	44" [1,117 mm]	22-1/4" [565 mm]	_	_

\* Minimum Cabinet Opening Width AND Minimum Cabinet Interior Width equals total width of completely assembled unit with all baskets applied, plus 1/2" clearance per side (1" total clearance for center-mounted units, 1/2" side clearance for side-mounted units). Dimensions shown are recommended minimum cabinet dimensions and clearances.