
Medium-Duty 100 lb. Load Class 1/2" Side Clearance Max. Drawer Width: 24"







6400 Stainless Steel Drawer Slide

The 6400 Stainless Steel Drawer Slide is manufactured from 304 series grade stainless steel and uses a USDA H-1 approved grease.

Applications

- Outdoor Cooking Areas
- Costal Environments
- Watercraft

Specifications

Model: 6400 Full Extension Stainless Steel Drawer Slide Mounting: Side Disconnect: Lever Release Hole Pattern: 32mm and Traditional Face Frame Mounting: Yes Type: Ball-Bearing Travel: Full Extension Finish: Stainless Steel Length: 10", 12", 14", 16", 18", 20", 22", 24", 26", 28" Clearance: .50" + .03"-0" on each side Height: 1.78" [45.2mm] Packaging: Poly Pack: all sizes - 10 pair per carton Action: Telescopic Slide Configuration: Unhanded

Rating

Load: 100 lb.

Max. Drawer Width: 24"

As with all Knape & Vogt drawer slides, the 6400 is designed to meet or exceed ANSI performance standards as established by BIFMA, BHMA and KCMA.


Hardware

#8 x 1/2" Stainless Steel Pan Head Screws (included)

Warranty

Limited Lifetime Warranty

Charted Information

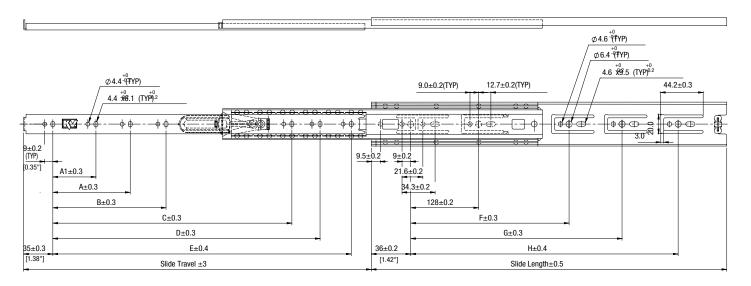

SKU Number*	Slide Size inch/mm	Length inch/mm	Travel inch/mm	A1 inch/mm	A inch/mm	B inch/mm	C inch/mm	D inch/mm	E inch/mm	F inch/mm	G inch/mm	H inch/mm
6400P SS 10	10" [250mm]	9.84" [250mm]	10" [254mm]	-	-	-	-	-	7.56" [192mm]	-	-	-
6400P SS 12	12" [300mm]	11.81" [300mm]	12" [305mm]	-	-	-	-	-	9.53" [242mm]	8.82" [224mm]	-	-
6400P SS 14	14" [350mm]	13.78" [350mm]	14" [356mm]	-	-	-	-	-	11.50" [292mm]	8.82" [224mm]	-	-
6400P SS 16	16" [400mm]	15.75" [400mm]	16" [406mm]	-	-	12.60" [320mm]	-	-	13.46" [342mm]	8.82" [224mm]	12.60" [320mm]	-
6400P SS 18	18" [450mm]	17.72" [450mm]	18" [457mm]	-	5.04" [128mm]	12.60" [320mm]	-	-	15.43" [392mm]	8.82" [224mm]	13.86" [352mm]	-
6400P SS 20	20" [500mm]	19.69" [500mm]	20" [508mm]	-	5.04" [128mm]	13.86" [352mm]	-	-	17.40" [442mm]	8.82" [224mm]	16.38" [416mm]	-
6400P SS 22	22" [550mm]	21.65" [550mm]	22" [559mm]	-	5.04" [128mm]	-	16.38" [416mm]	-	19.37" [492mm]	8.82" [224mm]	13.86" [352mm]	17.64" [448mm]
6400P SS 24	24" [600mm]	23.62" [600mm]	24" [610mm]	5.04" [128mm]	-	-	16.38" [416mm]	-	21.34" [542mm]	8.82" [224mm]	13.86" [352mm]	18.90" [480mm]
6400P SS 26	26" [650mm]	25.59" [650mm]	26" [660mm]	5.04" [128mm]	8.82" [224mm]	-	16.38" [416mm]	21.42" [544mmm]	23.30" [592mm]	8.82" [224mm]	13.86" [352mm]	21.42" [544mm]
6400P SS 28	28" [700mm]	27.56" [700mm]	28" [711mm]	5.04" [128mm]	8.82" [224mm]	-	17.64" [448mm]	21.42" [544mmm]	25.27" [642mm]	8.82" [224mm]	13.86" [352mm]	21.42" [544mm]



This and other KV literature is available for download at www.kv.com > Resource Library

Knape & Vogt reserves the right to change product specifications at any time without notice and without incurring responsibility for existing units. ©2017 Knape & Vogt. KV and the KV logo are trademarks of Knape & Vogt.