Medium-Duty

100 lb. Load Class 1/2" Side Clearance Max. Drawer Width: 24"





Profile .50" [12.7mm] 1.79" [45.5mm ± 0.3] .50" 1.79" .50" + .03"- 0" 12.7mm + .8mm - 0mm

4500 Ball-Bearing Drawer Slide

An "economy grade" slide engineered to compete with today's value-priced slides, KV DuriSlide™ is the right choice in a medium-duty slide for the professional with a budget. The DuriSlide 4500 ball-bearing construction delivers smooth operation backed by best-in-class KV quality, reliability and service.

Applications

- · Wood residential and commercial furniture
- · Architectural, laboratory and school casework
- Store fixtures and displays
- · Storage drawers

Specifications

Model: 4500 Ball-Bearing Drawer Slide

Mounting: Side
Disconnect: Lever

Hole Pattern: 32mm and Traditional

Type: Ball-Bearing
Travel: Full Extension
Finish: Zinc (ZC)

Length: 250mm, 300mm, 350mm, 400mm, 450mm, 500mm, 550mm, 600mm, 650mm, 700mm

Clearance: .50" + .03"-0" on each side

Height: 1.79" [45mm]

Packaging: Bulk Pack - DUR45B: all sizes - 10 pair per carton

(Available KVGR warehouse or drop ship container)

Q Pack - DUR45Q: all sizes - 20 cabinet members per carton,

100 drawer members per carton

(Available drop ship container only from Asia. Contact KV Customer Service for container orders)

Action: Telescopic movement on ball-bearings

Slide Configuration: Unhanded

Rating

Load: 100 lb.

Max. Recommended Drawer Width: 24"

As with all Knape & Vogt drawer slides, the 4500 is designed to meet BHMA test standards


Hardware

#7 x 1/2" Phillips Pan Head

Warranty

One Year Limited Warranty

Charted Information

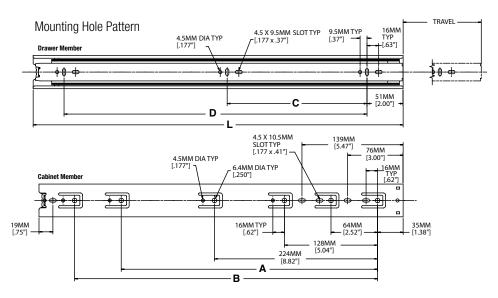


SKU Number Bulk Pack	Bulk Pack MOQ - Sets*	SKU Number Q Pack	Q Pack MOQ - Eaches*	Slide Size mm/inch	Length mm/inch	Travel mm/inch	A mm/inch	B mm/inch	C mm/inch	D mm/inch
DUR45B 250	960	DUR45-90 250	2,400	250mm [10"]	250mm [9.84"]	250mm [9.84"]	_	_	_	176mm [6.93"]
		DUR45-92 250	2,400							
DUR45B 300	850	DUR45-90 300	1,900	300mm [12"]	300mm [11.81"]	300mm [11.81"]	_	_	96mm [3.76"]	224mm [8.82"]
		DUR45-92 300	1,900							
DUR45B 350	700	DUR45-90 350	1,900	350mm [14"]	350mm [13.78"]	350mm [13.78"]	_	_	128mm [5.04"]	256mm [10.08"]
		DUR45-92 350	1,900							
DUR45B 400	560	DUR45-90 400	1,600	400mm [16"]	400mm [15.75"]	400mm [15.75"]	288mm [11.34"]	_	160mm [6.30"]	320mm [12.60"]
		DUR45-92 400	1,600							
DUR45B 450	550	DUR45-90 450	1,200	450mm [18"]	450mm [17.72"]	450mm [17.72"]	352mm [13.86"]	_	160mm [6.30"]	352mm [13.86"]
		DUR45-92 450	1,200							
DUR45B 500	440	DUR45-90 500	1,200	500mm [20"]	500mm [19.69"]	500mm [19.69"]	352mm [13.86"]	416mm [16.38"]	192mm [7.56"]	416mm [16.38"]
		DUR45-92 500	1,200							
DUR45B 550	400	DUR45-90 550	1,000	550mm [22"]	550mm [21.65"]	550mm [21.65"]	352mm [13.86"]	416mm [16.38"]	224mm [8.82"]	448mm [17.64"]
		DUR45-92 550	1,000							
DUR45B 600	400	DUR45-90 600	1,000	600mm [24"]	600mm [23.62"]	600mm [23.62"]	224mm [8.82"]	352mm [13.86"]	480mm [18.90"]	256mm [10.08"]
		DUR45-92 600	1,000							
DUR45B 650	400	DUR45-90 650	1,000	650mm [26"]	650mm [25.29"]	650mm [25.29"]	224mm [8.82"]	352mm [13.86"]	544mm [21.42"]	288mm [11.34"]
		DUR45-92 650	1,000							
DUR45B 700	300	DUR45-90 700	600	700mm [28"]	700mm [27.56"]	700mm [27.56"]	224mm [8.82"]	352mm [13.86"]	544mm [21.42"]	288mm [11.34"]
		DUR45-92 700	600							

*Drop Ship Full Container - full pallet quantities vary by size. Bulk Pack - 10 sets per carton

Q Pack -

Cabinet Assemblies - 20 pieces per carton Tracks - 100 pieces per carton

Full pallet quantities listed in table above.



Carton Quantity

SKU

DUR45-RBKT 200 (10 Inner Boxes of 20 Brackets)

Pallet Qty: 7,200 each

DUR45-RBKTB | 200 (200 Loose Brackets) Pallet Qty: 7,200 each

Rear Mounting Bracket (sold separately)



1.800.253.1561 | 616.459.3311

Fax: 877.636.3290

www.kv.com

& VOGT

Distributed by Knape & Vogt Manufacturing Company.

This and other KV literature is available for download at www.kv.com > Resource Library.

Knape & Vogt reserves the right to change product specifications at any time without notice and without incurring responsibility for existing units.